



DC ISOLATORS
ART. 590.DCGE0825
590.DCGE0830

WIRES RANGE AND TIGHTENING TORQUE	
Wire range	4 - 25mm ²
Max Tightening torque	2Nm
Wire strip length	 10mm

WARNING:
INTERNAL
CONTACTS SWITCH
LINKING IS NEEDED


FOR A DIFFERENT
INTERNAL CONTACTS
SWITCH LINKING
FOLLOW THE WIRING
DIAGRAM OPTIONS
SHOWN BELOW

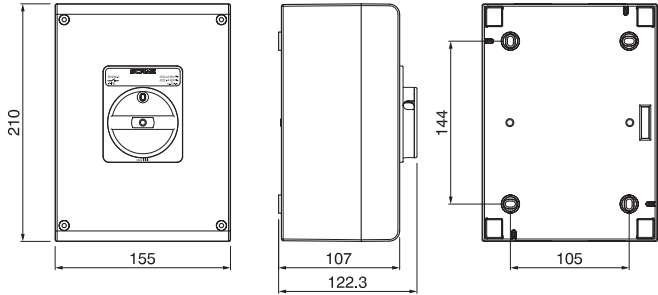


POSSIBLE CONTACTS SWITCH LINKING

590.DCGE0825
(SINGLE STRING 2 POLES) - 6 CONTACTS IN SERIES (4+2) OR (3+3)

Provided pre-wired linking
 Bottom incoming
 and outgoing (4+2) series




Option 1
 Top incoming
 Bottom outgoing (3+3) series




590.DCGE0830 - 590.DCGE0840
(SINGLE STRING 2 POLES) - 8 CONTACTS IN SERIES (4+4) OR (7+1)


Provided pre-wired
 Bottom incoming
 and outgoing (4+4) series






Option 1
 Top incoming
 Bottom outgoing (7+1) series



ART. 590.DCGE0840

WIRES RANGE AND TIGHTENING TORQUE	
Wire range	10-70mm ²
Max Tightening torque	6Nm
Wire strip lenght 	13mm

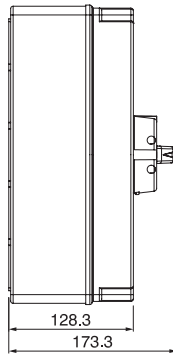

InfoTECH

ITALY Numero Verde 800-018009	WORLDWIDE ScameOnLine www.scame.com infotech@scame.com
--	---